DESCRIPTION

5" round recessed adjustable slot aperture fixture with hot aiming feature. For use with 12V MR16 lamp 71W max., Metal Halide MR16 20W or 39W.

For use in downlighting / accent applications.

Catalog #		**Type**	
Project			
Comments		**Date**	
Prepared by			

SPECIFICATION FEATURES

A ...Trim
5" Round adjustable slot aperture trim fixture.

B ...Lamp
For use with 12V MR16 lamp 71W max. Metal Halide MR16 20W or 39W. Lamp not included. Lamp holder has 45° HOT AIMING adjustability. 12V MR16 fixture includes clear protective glass lens and can accept up to three (3) optical accessories total.

C ...Socket
Posi-Grip bi-pin socket for 12V MR16. GX10 for metal halide lamps. (Included with Accurus Housing sold separately)

D ...Hot Aiming
Lamp may be adjusted with the power on by using a philips screwdriver for up to 45° tilt. Self locking rack and pinion mechanism and visual angle indicators ensure precise adjustment.

E ...Finish
Trim face is powder coated in white, black, industrial silver, stainless steel or primer finish for painting in existing ceiling color. All other internal components are flat black.

F....Safety
Steel safety cable provided. Attaches to tab inside housing to prevent falling during maintenance or as a result of accidental dislodging of the trim.

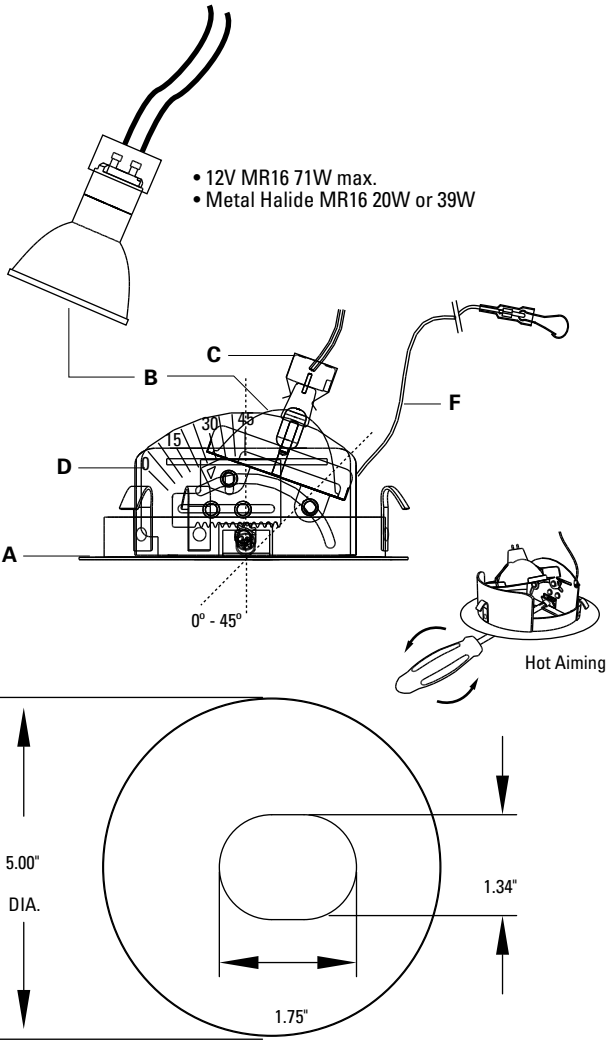

ACCURUS TRIM

ACT1685
5" Round Recessed Slot Aperture Fixture

12V MR16 71W max.
METAL HALIDE MR16 20W or 39W

Compatible Housings:
ACT950 / ACT950MH
ACT952IC / ACT952ICMH
ACT954RM / ACT954RMMH

c UL us Suitable for Damp Location

ORDERING INFORMATION

ACT1685	

Fixture
ACT1685 = 5" Round Trim Slot Aperture Fixture

Finish
WH = White
BK = Black
S = Industrial Silver
SS = Stainless Steel (painted)
PM = Primer